



Primary Lithium Cylindrical Cells
Lithium-Thionyl-Chloride

Product Overview

Type Designation	Type No.	Voltage (V)	Capacity (mAh)	Diameter (mm)	Height (mm)	Weight (g)
Primary Lithium Cylindrical Cells - Series ER						
ER 1/2 AA	7126	3.6	1200	14.6	25.1	8.8
ER AA	7106	3.6	2500	14.6	50.5	16.0
ER C	7114	3.6	8500	25.9	50.0	51.0
ER D	7120	3.6	19000	33.8	59.7	100.0

Quality


- High operation voltage
- Low self discharge (less than 1% per year at RT)
- Superior shelf life and operational life (up to 10 years and more)
- Wide temperature range (-55 to +85°C)

Key Features – Benefits

- Safety: all cells are UL recognized
- Broad capacity range from 1200 - 19000 mAh
- Backup power supply for sophisticated safety applications

Applications

- Metering
- Medical
- Home and office security systems
- Memory backup in elevated temperature environment
- Smoke detectors

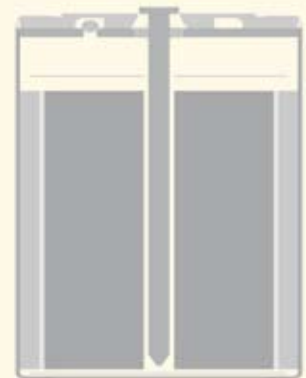

Contact

Headquarters Germany

VARTA Microbattery GmbH, Daimlerstraße 1, 73479 Ellwangen, Germany
Tel +49 79 61 921 - 280 | Fax +49 79 61 921 - 553

America

VARTA Microbattery, Inc., 1311 Mamaroneck Avenue, Suite 120
White Plains, NY 10605, USA
Tel +1 914 - 592 25 00 | Fax +1 914 - 345 04 88

Asia Pacific

VARTA Microbattery Pte. Ltd., 300 Tampines Avenue 5, #05-01
Tampines Junction, Singapore 529653
Tel +65 6 260 58 01 | Fax +65 6 260 58 12

VARTA Microbattery is a Company of
Montana Tech Components AG,
Hauptstrasse 35, 5737 Menziken, Switzerland

MONTANA
TECH COMPONENTS

